

soundservices.co.uk

Sound Services, 43 Albany Road, Fleet, Hants, GU51 3PU, UK

phone: 01252 620227


fax: 01252 627505

email: sales@soundservices.co.uk

www.soundservices.co.uk

www.soundservices.org.uk

VAT: 479 7542 37

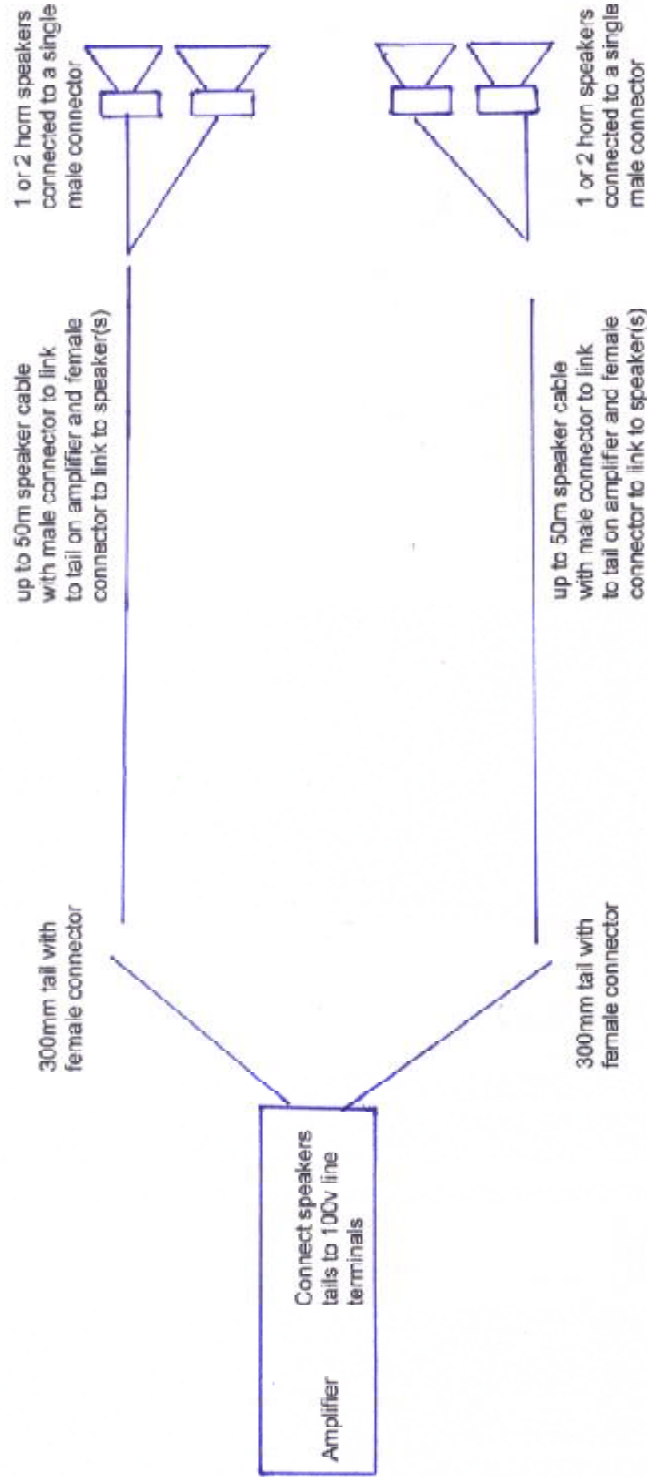

It is often preferable to have two tripods with cross bars (or similar supports) for each pair of horn loudspeakers – this allows for easier wiring and for you to angle the pairs of loudspeakers at 45 degrees each way (that is 90 degrees from each other) – this will produce good sound coverage with a good 'single point sound source' which will help to reduce echo and make speech easier to understand.

It is not usually desirable to play music over horn loudspeakers.

**Total wattage of all 100v line
loudspeakers on a sound system
must not exceed rated amplifier
output wattage**

Do not use 'direct', 'low impedance' or '8 Ohm' switch positions on this speaker when using 100v line sound systems

Connect speaker to 'com' & '100v' on amplifier and not to low impedance or 8 ohms

Set each speaker to the wattage required – the total wattage must not exceed the rated output of the amplifier – ie: 6 x 20w speakers on a 120w / 100v line amplifier

PLEASE read all printed instruction sheets & instruction books etc. prior to installation

soundservices.co.uk

sound-services.info

01252 620227

fax 01252 627505