



## adastra from sound services knowledge base

### Installation of adastra 952.185 & 187 quick-fit ceiling speakers

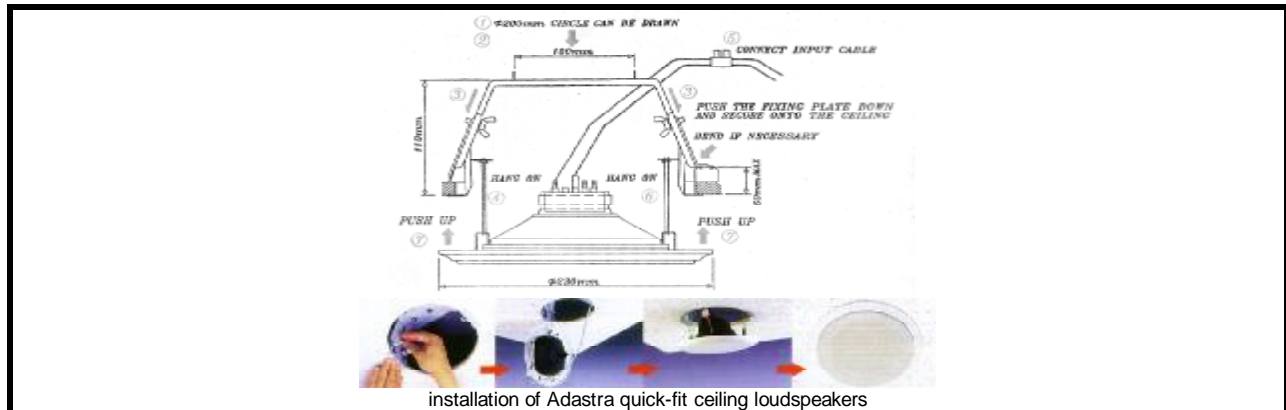

- Draw a 200mm circle (for 952.187) and cut this hole out of the ceiling or ceiling tile (**160mm for 952.185**)
- Place the mounting bracket into the hole and secure it with the two wing bolts provided
- Hang the speaker from the bracket by clipping one of the suspension springs on to the hook of the bracket
- Connect the 'tapping' tag to the wattage required on the transformer
- Connect the 100V line audio feed from the amplifier to the connector terminal on the speaker
- Hang the other suspension spring on to the opposite hook of the bracket
- Push the speaker up to the ceiling so that it has a flush fitting

100V Line Systems must always have their loudspeakers wired in PARALLEL:



PLEASE NOTE: The total load presented to the amplifier must not exceed the rated output of the amplifier or damage can result.

COPYRIGHT - February 2002 This publication cannot be reproduced wholly or in part without prior consent from adastra and Sound Services