


Wiring a 2 wire condenser microphone such as the IMG Stageline ECM300L to the IMG Stageline TXS870HSE or TXS890HSE bodyworn radiomic transmitter

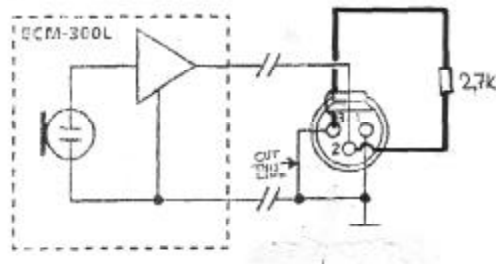

2 wire condenser mic:

- Screen to pin 1 of 3 pin mini XLR
- Signal to pin 2 of 3 pin mini XLR
- 2.7k resistor between pins 2 & 3 of 3 pin mini XLR

If using ECM300L then remove link between pins 1 & 3 of 3 pin mini XLR and follow above instructions